

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
28 August 2003 (28.08.2003)

PCT

(10) International Publication Number
WO 2003/071086 A3

(51) International Patent Classification⁷: E21B 43/10

(21) International Application Number:
PCT/US2003/000609

(22) International Filing Date: 9 January 2003 (09.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/357,372 15 February 2002 (15.02.2002) US

(71) Applicant (for all designated States except US): ENVEN-
TURE GLOBAL TECHNOLOGY [US/US]: 16200 A
Park Row, Houston, TX 77084 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): COOK, Robert,

Lance [US/US]: 934 Caswell Court, Katy, TX 77450 (US),
RING, Lev [RU/US]: 14126 Heatherhill Place, Houston,
TX 77077 (US), DEAN, William, J. [US/US]: 22602
Crescent Cove Court, Katy, TX 77494 (US), WADDELL,
Kevin, K. [US/US]: 11007 Sprucedale Court, Houston,
TX 77070 (US).

(74) Agents: MATTINGLY, Todd et al.; Haynes and Boone,
L.L.P., Suite 4300, 1000 Louisiana Street, Houston, TX
77002-5012 (US).


(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SK, SL,
TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW).

[Continued on next page]

(54) Title: MONO-DIAMETER WELLBORE CASING

(57) Abstract: A mono-diameter wellbore casing.

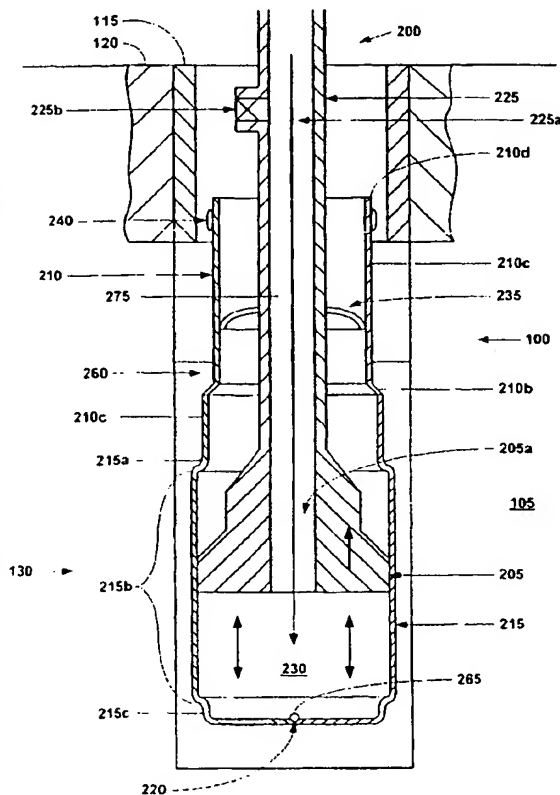

WO 2003/071086 A3

BEST AVAILABLE COPY



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *with international search report*

(88) Date of publication of the international search report:

22 July 2004

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/00609

A. CLASSIFICATION OF SUBJECT MATTER												
IPC(7) : E21B 43/10 US CL : 166/380, 207												
According to International Patent Classification (IPC) or to both national classification and IPC												
B. FIELDS SEARCHED												
Minimum documentation searched (classification system followed by classification symbols) U.S. : 166/380, 207, 212, 216, 217												
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched												
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)												
C. DOCUMENTS CONSIDERED TO BE RELEVANT												
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.										
A	US 2002/0033261 A1 (METCALFE) 21 March 2002 (21.03.02), summary.	1-55										
A	US 6,085,838 A (VERCAEMER et al.) 11 July 2000 (11.07.02), figures 5-7.	1-55										
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.												
* Special categories of cited documents: <table border="0"> <tr> <td>"A" document defining the general state of the art which is not considered to be of particular relevance</td> <td>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"E" earlier application or patent published on or after the international filing date</td> <td>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"O" document referring to an oral disclosure, use, exhibition or other means</td> <td>"&" document member of the same patent family</td> </tr> <tr> <td>"P" document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"E" earlier application or patent published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family	"P" document published prior to the international filing date but later than the priority date claimed	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention											
"E" earlier application or patent published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone											
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art											
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family											
"P" document published prior to the international filing date but later than the priority date claimed												
Date of the actual completion of the international search 15 April 2003 (15.04.2003)		Date of mailing of the international search report 20 MAY 2004										
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703)305-3230		Authorized Officer David Bagnell Telephone No. (703) 308-1113										

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
28 August 2003 (28.08.2003)

PCT

(10) International Publication Number
WO 2003/071086 A3

(51) International Patent Classification⁷: **E21B 43/10**

(21) International Application Number:
PCT/US2003/000609

(22) International Filing Date: 9 January 2003 (09.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/357,372 15 February 2002 (15.02.2002) US

(71) Applicant (for all designated States except US): **ENVENTURE GLOBAL TECHNOLOGY** [US/US]; 16200 A Park Row, Houston, TX 77084 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **COOK, Robert,**

Lance [US/US]; 934 Caswell Court, Katy, TX 77450 (US).
RING, Lev [RU/US]; 14126 ~~Heatherhill~~ Place, Houston, TX 77077 (US). **DEAN, William, J.** [US/US]; 22602 Crescent Cove Court, Katy, TX **77494** (US). **WADDELL, Kevin, K.** [US/US]; 11007 Sprucedale Court, Houston, TX 77070 (US).

(74) Agents: **MATTINGLY, Todd et al.**; Haynes and Boone, LLP, Suite 4300, 1000 Louisiana Street, Houston, TX 77002-5012 (US).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, **EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.**

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, **SZ, TZ, UG, ZM, ZW**),

[Continued on next page]

(54) Title: **MONO-DIAMETER WELLBORE CASING**

(57) Abstract: A mono-diameter wellbore casing.

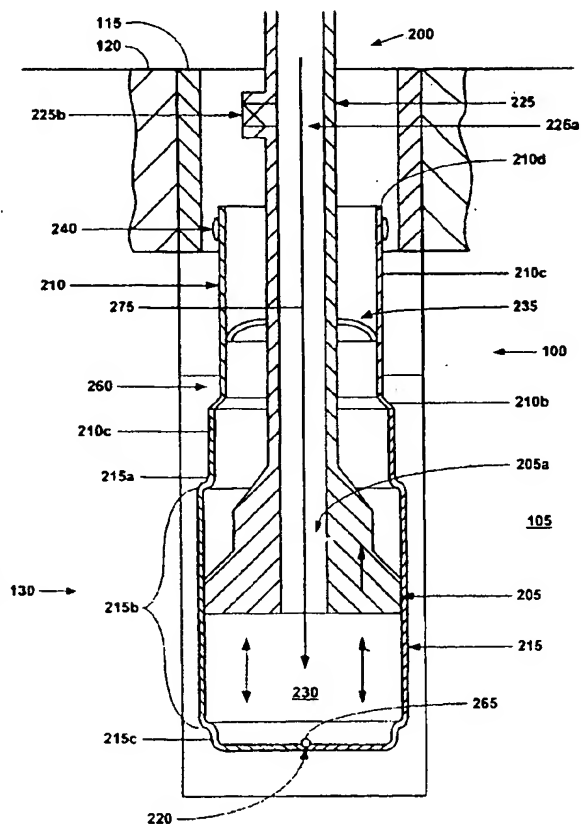

WO 2003/071086 A3



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

— with amended claims

(88) Date of publication of the international search report:
22 July 2004

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

Date of publication of the amended claims: 14 October 2004

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

AMENDED CLAIMS

[Received by the International Bureau on 15 July 2004 (15.07.04):
original claims 1 - 55 amended;
new claims 56 - 78 added (2 pages)]

Claims

1. An apparatus for forming a wellbore casing in a borehole located in a subterranean formation including a preexisting wellbore casing, comprising:
 - a support member including a first fluid passage;
 - an expansion cone coupled to the support member including a second fluid passage fluidically coupled to the first fluid passage;
 - an expandable tubular liner movably coupled to the expansion cone; and
 - an expandable shoe coupled to the expandable tubular liner;wherein the expansion cone is adjustable to a plurality of stationary positions.
2. The apparatus of claim 1, wherein the expandable shoe includes a valveable fluid passage for controlling the flow of fluidic materials out of the expandable shoe.
3. The apparatus of claim 1, wherein the expandable shoe includes:
 - an expandable portion; and
 - a remaining portion coupled to the expandable portion;wherein the outer circumference of the expandable portion is greater than the outer circumference of the remaining portion.
4. The apparatus of claim 3, wherein the expandable portion includes:
one or more inward folds.
5. The apparatus of claim 3, wherein the expandable portion includes:
one or more corrugations.
6. The apparatus of claim 1, wherein the expandable shoe includes:
one or more inward folds.
7. The apparatus of claim 1, wherein the expandable shoe includes:
one or more corrugations.
8. A method of forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:

- installing a tubular liner, an adjustable expansion cone, and a shoe in the borehole;
radially expanding at least a portion of the shoe by a process comprising:
adjusting the adjustable expansion cone to a first outside diameter; and
injecting a fluidic material into the shoe; and
radially expanding at least a portion of the tubular liner by a process comprising:
adjusting the adjustable expansion cone to a second outside diameter; and
injecting a fluidic material into the borehole below the expansion cone.
9. The method of claim 8, wherein the first outside diameter of the adjustable expansion cone is greater than the second outside diameter of the adjustable expansion cone.
10. The method of claim 8, wherein radially expanding at least a portion of the shoe further comprises:
lowering the adjustable expansion cone into the shoe; and
adjusting the adjustable expansion cone to the first outside diameter.
11. The method of claim 8, wherein radially expanding at least a portion of the shoe further comprises:
pressurizing a region within the shoe below the adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the adjustable expansion cone using the fluidic material.
12. The method of claim 8, wherein radially expanding at least a portion of the tubular liner further comprises:
pressurizing a region within the shoe below the adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the adjustable expansion cone using the fluidic material.
13. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
means for installing a tubular liner, an adjustable expansion cone, and a shoe in the borehole;

means for radially expanding at least a portion of the shoe comprising:
means for adjusting the adjustable expansion cone to a first outside diameter; and
means for injecting a fluidic material into the shoe; and
means for radially expanding at least a portion of the tubular liner comprising:
means for adjusting the adjustable expansion cone to a second outside diameter;
and
means for injecting a fluidic material into the borehole below the adjustable
expansion cone.

14. The system of claim 13, wherein the first outside diameter of the adjustable expansion cone is greater than the second outside diameter of the adjustable expansion cone.
15. The system of claim 13, wherein the means for radially expanding at least a portion of the shoe further comprises:
 - means for lowering the adjustable expansion cone into the shoe; and
 - means for adjusting the adjustable expansion cone to the first outside diameter.
16. The system of claim 13, wherein the means for radially expanding at least a portion of the shoe further comprises:
 - means for pressurizing a region within the shoe below the adjustable expansion cone using a fluidic material; and
 - means for pressurizing an annular region above the adjustable expansion cone using the fluidic material.
17. The system of claim 13, wherein the means for radially expanding at least a portion of the tubular liner further comprises:
 - means for pressurizing a region within the shoe below the adjustable expansion cone using a fluidic material; and
 - means for pressurizing an annular region above the adjustable expansion cone using the fluidic material.
18. A wellbore casing positioned in a borehole within a subterranean formation, comprising:

a first wellbore casing comprising:
an upper portion of the first wellbore casing; and
a lower portion of the first wellbore casing coupled to the upper portion of the first wellbore casing;
wherein the inside diameter of the upper portion of the first wellbore casing is less than the inside diameter of the lower portion of the first wellbore casing; and
a second wellbore casing comprising:
an upper portion of the second wellbore casing that overlaps with and is coupled to the lower portion of the first wellbore casing; and
a lower portion of the second wellbore casing coupled to the upper portion of the second wellbore casing;
wherein the inside diameter of the upper portion of the second wellbore casing is less than the inside diameter of the lower portion of the second wellbore casing;
and
wherein the inside diameter of the upper portion of the first wellbore casing is equal to the inside diameter of the upper portion of the second wellbore casing;
wherein the second wellbore casing is coupled to the first wellbore casing by the process of:
installing the second wellbore casing and an adjustable expansion cone within the borehole;
radially expanding at least a portion of the lower portion of the second wellbore casing by a process comprising:
adjusting the adjustable expansion cone to a first outside diameter; and
injecting a fluidic material into the second wellbore casing; and
radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:
adjusting the adjustable expansion cone to a second outside diameter; and
injecting a fluidic material into the borehole below the adjustable expansion cone.

19. The wellbore casing of claim 18, wherein the first outside diameter of the adjustable expansion cone is greater than the second outside diameter of the adjustable expansion cone.

20. The wellbore casing of claim 18, wherein radially expanding at least a portion of the lower portion of the second wellbore casing further comprises:
lowering the adjustable expansion cone into the lower portion of the second wellbore casing; and
adjusting the adjustable expansion cone to the first outside diameter.
21. The wellbore casing of claim 18, wherein radially expanding at least a portion of the lower portion of the second wellbore casing further comprises:
pressurizing a region within the lower portion of the second wellbore casing below the adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the adjustable expansion cone using the fluidic material.
22. The wellbore casing of claim 18, wherein radially expanding at least a portion of the upper portion of the second wellbore casing further comprises:
pressurizing a region within the lower portion of the second wellbore casing below the adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the adjustable expansion cone using the fluidic material.
23. An apparatus for forming a wellbore casing in a borehole located in a subterranean formation including a preexisting wellbore casing, comprising:
a support member including a first fluid passage;
a first adjustable expansion cone coupled to the support member including a second fluid passage fluidically coupled to the first fluid passage;
a second adjustable expansion cone coupled to the support member including a third fluid passage fluidically coupled to the first fluid passage;
an expandable tubular liner movably coupled to the first and second adjustable expansion cones; and
an expandable shoe coupled to the expandable tubular liner.
24. The apparatus of claim 23, wherein the expandable shoe includes a valveable fluid passage for controlling the flow of fluidic materials out of the expandable shoe.

25. The apparatus of claim 23, wherein the expandable shoe includes:
an expandable portion; and
a remaining portion coupled to the expandable portion;
wherein the outer circumference of the expandable portion is greater than the outer
circumference of the remaining portion.
26. The apparatus of claim 25, wherein the expandable portion includes:
one or more inward folds.
27. The apparatus of claim 25, wherein the expandable portion includes:
one or more corrugations.
28. The apparatus of claim 23, wherein the expandable shoe includes:
one or more inward folds.
29. The apparatus of claim 23, wherein the expandable shoe includes:
one or more corrugations.
30. A method of forming a wellbore casing in a subterranean formation having a
preexisting wellbore casing positioned in a borehole, comprising:
installing a tubular liner, an upper adjustable expansion cone, a lower adjustable
expansion cone, and a shoe in the borehole;
radially expanding at least a portion of the shoe by a process comprising:
adjusting the lower adjustable expansion cone to an increased outside diameter; and
injecting a fluidic material into the shoe; and
radially expanding at least a portion of the tubular liner by a process comprising:
adjusting the lower adjustable expansion cone to a reduced outside diameter;
adjusting the upper adjustable expansion cone to an increased outside diameter; and
injecting a fluidic material into the borehole below the lower adjustable expansion
cone.
31. The method of claim 30, wherein the increased outside diameter of the lower
adjustable expansion cone is greater than the increased outside diameter of the upper
adjustable expansion cone.

32. The method of claim 30, wherein the reduced outside diameter of the lower adjustable expansion cone is less than or equal to the increased outside diameter of the upper adjustable expansion cone.

33. The method of claim 30, wherein radially expanding at least a portion of the shoe further comprises:

- lowering the lower adjustable expansion cone into the shoe; and
- adjusting the lower adjustable expansion cone to the increased outside diameter.

34. The method of claim 30, wherein radially expanding at least a portion of the shoe further comprises:

- pressurizing a region within the shoe below the lower adjustable expansion cone using a fluidic material; and
- pressurizing an annular region above the upper adjustable expansion cone using the fluidic material.

35. The method of claim 30, wherein radially expanding at least a portion of the tubular liner further comprises:

- pressurizing a region within the shoe below the lower adjustable expansion cone using a fluidic material; and
- pressurizing an annular region above the upper adjustable expansion cone using the fluidic material.

36. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:

- means for installing a tubular liner, an upper adjustable expansion cone, a lower adjustable expansion cone, and a shoe in the borehole;
- means for radially expanding at least a portion of the shoe comprising:
- means for adjusting the lower adjustable expansion cone to an increased outside diameter; and
- means for injecting a fluidic material into the shoe; and
- means for radially expanding at least a portion of the tubular liner comprising:

means for adjusting the lower adjustable expansion cone to a reduced outside diameter;

means for adjusting the upper adjustable expansion cone to an increased outside diameter; and

means for injecting a fluidic material into the borehole below the lower adjustable expansion cone.

37. The system of claim 36, wherein the increased outside diameter of the lower adjustable expansion cone is greater than the increased outside diameter of the upper adjustable expansion cone.

38. The system of claim 36, wherein the reduced outside diameter of the lower adjustable expansion cone is less than or equal to the increased outside diameter of the upper adjustable expansion cone.

39. The system of claim 36, wherein the means for radially expanding at least a portion of the shoe further comprises:

means for lowering the lower adjustable expansion cone into the shoe; and

means for adjusting the lower adjustable expansion cone to the increased outside diameter.

40. The system of claim 36, wherein the means for radially expanding at least a portion of the shoe further comprises:

means for pressurizing a region within the shoe below the lower adjustable expansion cone using a fluidic material; and

means for pressurizing an annular region above the upper adjustable expansion cone using the fluidic material.

41. The system of claim 36, wherein the means for radially expanding at least a portion of the tubular liner further comprises:

means for pressurizing a region within the shoe below the lower adjustable expansion cone using a fluidic material; and

means for pressurizing an annular region above the upper adjustable expansion cone using the fluidic material.

42. A wellbore casing positioned in a borehole within a subterranean formation, comprising:

a first wellbore casing comprising:

an upper portion of the first wellbore casing; and

a lower portion of the first wellbore casing coupled to the upper portion of the first wellbore casing;

wherein the inside diameter of the upper portion of the first wellbore casing is less than the inside diameter of the lower portion of the first wellbore casing; and

a second wellbore casing comprising:

an upper portion of the second wellbore casing that overlaps with and is coupled to the lower portion of the first wellbore casing; and

a lower portion of the second wellbore casing coupled to the upper portion of the second wellbore casing;

wherein the inside diameter of the upper portion of the second wellbore casing is less than the inside diameter of the lower portion of the second wellbore casing; and

wherein the inside diameter of the upper portion of the first wellbore casing is equal to the inside diameter of the upper portion of the second wellbore casing;

wherein the second wellbore casing is coupled to the first wellbore casing by the process of:

installing the second wellbore casing, an upper adjustable expansion cone, a lower adjustable expansion cone, and a shoe in the borehole;

radially expanding at least a portion of the lower portion of the second wellbore casing shoe by a process comprising:

adjusting the lower adjustable expansion cone to an increased outside diameter; and

injecting a fluidic material into the lower portion of the second wellbore casing; and

radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:

adjusting the lower adjustable expansion cone to a reduced outside diameter;

adjusting the upper adjustable expansion cone to an increased outside diameter; and

injecting a fluidic material into the borehole below the lower adjustable expansion cone.

43. The wellbore casing of claim 42, wherein the increased outside diameter of the lower adjustable expansion cone is greater than the increased outside diameter of the upper adjustable expansion cone.
44. The wellbore casing of claim 42, wherein the reduced outside diameter of the lower adjustable expansion cone is less than or equal to the increased outside diameter of the upper adjustable expansion cone.
45. The wellbore casing of claim 42, wherein radially expanding at least a portion of the lower portion of the second wellbore casing further comprises:
lowering the lower adjustable expansion cone into the lower portion of the second wellbore casing; and
adjusting the lower adjustable expansion cone to the increased outside diameter.
46. The wellbore casing of claim 42, wherein radially expanding at least a portion of the lower portion of the second wellbore casing further comprises:
pressurizing a region within the lower portion of the second wellbore casing below the lower adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the upper adjustable expansion cone using the fluidic material.
47. The wellbore casing of claim 42, wherein radially expanding at least a portion of the upper portion of the second wellbore casing further comprises:
pressurizing a region within the lower portion of the second wellbore casing below the lower adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the upper adjustable expansion cone using the fluidic material.
48. An apparatus for forming a wellbore casing in a borehole located in a subterranean formation including a preexisting wellbore casing, comprising:
a support member including a first fluid passage;
an expansion cone coupled to the support member including a second fluid passage fluidically coupled to the first fluid passage;
an expandable tubular liner movably coupled to the expansion cone; and

an expandable shoe coupled to the expandable tubular liner comprising:
a valveable fluid passage for controlling the flow of fluidic materials out of the expandable shoe;
an expandable portion comprising one or more inward folds; and
a remaining portion coupled to the expandable portion;
wherein the outer circumference of the expandable portion is greater than the outer circumference of the remaining portion;
wherein the expansion cone is adjustable to a plurality of stationary positions.

49. A method of forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
installing a tubular liner, an adjustable expansion cone, and a shoe in the borehole;
radially expanding at least a portion of the shoe by a process comprising:
lowering the adjustable expansion cone into the shoe;
adjusting the adjustable expansion cone to a first outside diameter;
pressurizing a region within the shoe below the adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the adjustable expansion cone using the fluidic material; and
radially expanding at least a portion of the tubular liner by a process comprising:
adjusting the adjustable expansion cone to a second outside diameter;
pressurizing a region within the shoe below the adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the adjustable expansion cone using the fluidic material;
wherein the first outside diameter of the adjustable expansion cone is greater than the second outside diameter of the adjustable expansion cone.

50. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
means for installing a tubular liner, an adjustable expansion cone, and a shoe in the borehole;
means for radially expanding at least a portion of the shoe comprising:
means for lowering the adjustable expansion cone into the shoe;

means for adjusting the adjustable expansion cone to a first outside diameter;
means for pressurizing a region within the shoe below the adjustable expansion cone using a fluidic material; and
means for pressurizing an annular region above the adjustable expansion cone using the fluidic material; and
means for radially expanding at least a portion of the tubular liner comprising;
means for adjusting the adjustable expansion cone to a second outside diameter;
means for pressurizing a region within the shoe below the adjustable expansion cone using a fluidic material; and
means for pressurizing an annular region above the adjustable expansion cone using the fluidic material;
wherein the first outside diameter of the adjustable expansion cone is greater than the second outside diameter of the adjustable expansion cone.

51. A wellbore casing positioned in a borehole within a subterranean formation, comprising:

a first wellbore casing comprising:

an upper portion of the first wellbore casing; and

a lower portion of the first wellbore casing coupled to the upper portion of the first wellbore casing;

wherein the inside diameter of the upper portion of the first wellbore casing is less than the inside diameter of the lower portion of the first wellbore casing; and

a second wellbore casing comprising:

an upper portion of the second wellbore casing that overlaps with and is coupled to the lower portion of the first wellbore casing; and

a lower portion of the second wellbore casing coupled to the upper portion of the second wellbore casing;

wherein the inside diameter of the upper portion of the second wellbore casing is less than the inside diameter of the lower portion of the second wellbore casing; and

wherein the inside diameter of the upper portion of the first wellbore casing is equal to the inside diameter of the upper portion of the second wellbore casing;

wherein the second wellbore casing is coupled to the first wellbore casing by the process of:

installing the second wellbore casing and an adjustable expansion cone in the borehole;
radially expanding at least a portion of the lower portion of the second wellbore casing by a process comprising:
lowering the adjustable expansion cone into the lower portion of the second wellbore casing;
adjusting the adjustable expansion cone to a first outside diameter;
pressurizing a region within the lower portion of the second wellbore casing below the adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the adjustable expansion cone using the fluidic material; and
radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:
adjusting the adjustable expansion cone to a second outside diameter;
pressurizing a region within the shoe below the adjustable expansion cone using a fluidic material; and
pressurizing an annular region above the adjustable expansion cone using the fluidic material;
wherein the first outside diameter of the adjustable expansion cone is greater than the second outside diameter of the adjustable expansion cone.

52. An apparatus for forming a wellbore casing in a borehole located in a subterranean formation including a preexisting wellbore casing, comprising:
- a support member including a first fluid passage;
 - a first adjustable expansion cone coupled to the support member including a second fluid passage fluidically coupled to the first fluid passage;
 - a second adjustable expansion cone coupled to the support member including a third fluid passage fluidically coupled to the first fluid passage;
 - an expandable tubular liner movably coupled to the first and second adjustable expansion cones; and
 - an expandable shoe coupled to the expandable tubular liner comprising:
 - a valveable fluid passage for controlling the flow of fluidic materials out of the expandable shoe;
 - an expandable portion comprising one or more inwards folds; and

a remaining portion coupled to the expandable portion;
wherein the outer circumference of the expandable portion is greater than the outer circumference of the remaining portion.

53. A method of forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
- installing a tubular liner, an upper adjustable expansion cone, a lower adjustable expansion cone, and a shoe in the borehole;
 - radially expanding at least a portion of the shoe by a process comprising:
 - lowering the lower adjustable expansion cone into the shoe;
 - adjusting the lower adjustable expansion cone to an increased outside diameter;
 - pressurizing a region within the shoe below the lower adjustable expansion cone using a fluidic material; and
 - pressurizing an annular region above the upper adjustable expansion cone using the fluidic material; and
 - radially expanding at least a portion of the tubular liner by a process comprising:
 - adjusting the lower adjustable expansion cone to a reduced outside diameter;
 - adjusting the upper adjustable expansion cone to an increased outside diameter;
 - pressurizing a region within the shoe below the lower adjustable expansion cone using a fluidic material; and
 - pressurizing an annular region above the upper adjustable expansion cone using the fluidic material;
- wherein the increased outside diameter of the lower adjustable expansion cone is greater than the increased outside diameter of the upper adjustable expansion cone; and
- wherein the reduced outside diameter of the lower adjustable expansion cone is less than or equal to the increased outside diameter of the upper adjustable expansion cone.
54. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
- means for installing a tubular liner, an upper adjustable expansion cone, a lower adjustable expansion cone, and a shoe in the borehole;
 - means for radially expanding at least a portion of the shoe comprising:

means for lowering the lower adjustable expansion cone into the shoe;
means for adjusting the lower adjustable expansion cone to an increased outside diameter;
means for pressurizing a region within the shoe below the lower adjustable expansion cone using a fluidic material; and
means for pressurizing an annular region above the upper adjustable expansion cone using the fluidic material; and
means for radially expanding at least a portion of the tubular liner comprising:
means for adjusting the lower adjustable expansion cone to a reduced outside diameter;
means for adjusting the upper adjustable expansion cone to an increased outside diameter;
means for pressurizing a region within the shoe below the lower adjustable expansion cone using a fluidic material; and
means for pressurizing an annular region above the upper adjustable expansion cone using the fluidic material;
wherein the increased outside diameter of the lower adjustable expansion cone is greater than the increased outside diameter of the upper adjustable expansion cone; and
wherein the reduced outside diameter of the lower adjustable expansion cone is less than or equal to the increased outside diameter of the upper adjustable expansion cone.

55. A wellbore casing positioned in a borehole within a subterranean formation, comprising:

a first wellbore casing comprising:
an upper portion of the first wellbore casing; and
a lower portion of the first wellbore casing coupled to the upper portion of the first wellbore casing;
wherein the inside diameter of the upper portion of the first wellbore casing is less than the inside diameter of the lower portion of the first wellbore casing; and
a second wellbore casing comprising:
an upper portion of the second wellbore casing that overlaps with and is coupled to the lower portion of the first wellbore casing; and

a lower portion of the second wellbore casing coupled to the upper portion of the second wellbore casing;

wherein the inside diameter of the upper portion of the second wellbore casing is less than the inside diameter of the lower portion of the second wellbore casing;

and

wherein the inside diameter of the upper portion of the first wellbore casing is equal to the inside diameter of the upper portion of the second wellbore casing;

wherein the second wellbore casing is coupled to the first wellbore casing by the process of:

- installing the second wellbore casing, an upper adjustable expansion cone, and a lower adjustable expansion cone in the borehole;
- radially expanding at least a portion of the shoe by a process comprising:
 - lowering the lower adjustable expansion cone into the lower portion of the second wellbore casing;
 - adjusting the lower adjustable expansion cone to an increased outside diameter;
 - pressurizing a region within the lower portion of the second wellbore casing below the lower adjustable expansion cone using a fluidic material; and
 - pressurizing an annular region above the upper adjustable expansion cone using the fluidic material; and
- radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:
 - adjusting the lower adjustable expansion cone to a reduced outside diameter;
 - adjusting the upper adjustable expansion cone to an increased outside diameter;
 - pressurizing a region within the lower portion of the second wellbore casing below the lower adjustable expansion cone using a fluidic material; and
 - pressurizing an annular region above the upper adjustable expansion cone using the fluidic material;

wherein the increased outside diameter of the lower adjustable expansion cone is greater than the increased outside diameter of the upper adjustable expansion cone; and

wherein the reduced outside diameter of the lower adjustable expansion cone is less than or equal to the increased outside diameter of the upper adjustable expansion cone.

56. An apparatus for forming a wellbore casing in a borehole located in a subterranean formation including a preexisting wellbore casing, comprising:
- a support member defining a first fluid passage;
 - an expansion device coupled to the support member defining a second fluid passage fluidically coupled to the first fluid passage;
 - an expandable tubular liner movably coupled to the expansion device; and
 - an expandable shoe coupled to the expandable tubular liner;
- wherein the expansion device is adjustable to a plurality of stationary positions.
57. A method of forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
- installing a tubular liner, an adjustable expansion device, and a shoe in the borehole;
 - radially expanding at least a portion of the shoe by a process comprising:
 - adjusting the adjustable expansion device to a first outside diameter; and
 - injecting a fluidic material into the shoe; and
 - radially expanding at least a portion of the tubular liner by a process comprising:
 - adjusting the adjustable expansion device to a second outside diameter; and
 - injecting a fluidic material into the borehole below the adjustable expansion device.
58. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
- means for installing a tubular liner, an adjustable expansion device, and a shoe in the borehole;
 - means for radially expanding at least a portion of the shoe comprising:
 - means for adjusting the adjustable expansion device to a first outside diameter; and
 - means for injecting a fluidic material into the shoe; and
 - means for radially expanding at least a portion of the tubular liner comprising:
 - means for adjusting the adjustable expansion device to a second outside diameter; and
 - means for injecting a fluidic material into the borehole below the adjustable expansion device.

59. A wellbore casing positioned in a borehole within a subterranean formation, comprising:

a first wellbore casing comprising:

an upper portion of the first wellbore casing; and

a lower portion of the first wellbore casing coupled to the upper portion of the first wellbore casing;

wherein the inside diameter of the upper portion of the first wellbore casing is less than the inside diameter of the lower portion of the first wellbore casing; and

a second wellbore casing comprising:

an upper portion of the second wellbore casing that overlaps with and is coupled to the lower portion of the first wellbore casing; and

a lower portion of the second wellbore casing coupled to the upper portion of the second wellbore casing;

wherein the inside diameter of the upper portion of the second wellbore casing is less than the inside diameter of the lower portion of the second wellbore casing;

and

wherein the inside diameter of the upper portion of the first wellbore casing is equal to the inside diameter of the upper portion of the second wellbore casing;

wherein the second wellbore casing is coupled to the first wellbore casing by the process of:

installing the second wellbore casing and an adjustable expansion device within the borehole;

radially expanding at least a portion of the lower portion of the second wellbore casing by a process comprising:

adjusting the adjustable expansion device to a first outside diameter;

and

injecting a fluidic material into the second wellbore casing; and

radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:

adjusting the adjustable expansion device to a second outside diameter; and

injecting a fluidic material into the borehole below the adjustable expansion device.

60. An apparatus for forming a wellbore casing in a borehole located in a subterranean formation including a preexisting wellbore casing, comprising:

- a support member including a first fluid passage;
- a first adjustable expansion device coupled to the support member including a second fluid passage fluidically coupled to the first fluid passage;
- a second adjustable expansion device coupled to the support member including a third fluid passage fluidically coupled to the first fluid passage;
- an expandable tubular liner movably coupled to the first and second adjustable expansion devices; and
- an expandable shoe coupled to the expandable tubular liner.

61. A method of forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:

- installing a tubular liner, an upper adjustable expansion device, a lower adjustable expansion device, and a shoe in the borehole;
- radially expanding at least a portion of the shoe by a process comprising:
 - adjusting the lower adjustable expansion device to an increased outside diameter; and
 - injecting a fluidic material into the shoe; and
- radially expanding at least a portion of the tubular liner by a process comprising:
 - adjusting the lower adjustable expansion device to a reduced outside diameter;
 - adjusting the upper adjustable expansion device to an increased outside diameter; and
 - injecting a fluidic material into the borehole below the lower adjustable expansion device.

62. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:

- means for installing a tubular liner, an upper adjustable expansion device, a lower adjustable expansion device, and a shoe in the borehole;
- means for radially expanding at least a portion of the shoe comprising:
 - means for adjusting the lower adjustable expansion device to an increased outside diameter; and

means for injecting a fluidic material into the shoe; and
means for radially expanding at least a portion of the tubular liner comprising:
means for adjusting the lower adjustable expansion device to a reduced
outside diameter;
means for adjusting the upper adjustable expansion device to an increased
outside diameter; and
means for injecting a fluidic material into the borehole below the lower
adjustable expansion device.

63. A wellbore casing positioned in a borehole within a subterranean formation,
comprising:

a first wellbore casing comprising:

an upper portion of the first wellbore casing; and

a lower portion of the first wellbore casing coupled to the upper portion of the first
wellbore casing;

wherein the inside diameter of the upper portion of the first wellbore casing is less
than the inside diameter of the lower portion of the first wellbore casing; and

a second wellbore casing comprising:

an upper portion of the second wellbore casing that overlaps with and is coupled to
the lower portion of the first wellbore casing; and

a lower portion of the second wellbore casing coupled to the upper portion of the
second wellbore casing;

wherein the inside diameter of the upper portion of the second wellbore casing is less
than the inside diameter of the lower portion of the second wellbore casing;
and

wherein the inside diameter of the upper portion of the first wellbore casing is equal
to the inside diameter of the upper portion of the second wellbore casing;

wherein the second wellbore casing is coupled to the first wellbore casing by the
process of:

installing the second wellbore casing, an upper adjustable expansion device,
a lower adjustable expansion device, and a shoe in the borehole;

radially expanding at least a portion of the lower portion of the second
wellbore casing shoe by a process comprising:

adjusting the lower adjustable expansion device to an increased outside diameter; and
injecting a fluidic material into the lower portion of the second wellbore casing; and
radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:
adjusting the lower adjustable expansion device to a reduced outside diameter;
adjusting the upper adjustable expansion device to an increased outside diameter; and
injecting a fluidic material into the borehole below the lower adjustable expansion device.

64. An apparatus for forming a wellbore casing in a borehole located in a subterranean formation including a preexisting wellbore casing, comprising:

a support member including a first fluid passage;
an expansion device coupled to the support member including a second fluid passage fluidically coupled to the first fluid passage;
an expandable tubular liner movably coupled to the expansion device; and
an expandable shoe coupled to the expandable tubular liner comprising:
a valveable fluid passage for controlling the flow of fluidic materials out of the expandable shoe;
an expandable portion comprising one or more inward folds; and
a remaining portion coupled to the expandable portion;
wherein the outer circumference of the expandable portion is greater than the outer circumference of the remaining portion;
wherein the expansion device is adjustable to a plurality of stationary positions.

65. A method of forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:

installing a tubular liner, an adjustable expansion device, and a shoe in the borehole;
radially expanding at least a portion of the shoe by a process comprising:
lowering the adjustable expansion device into the shoe;
adjusting the adjustable expansion device to a first outside diameter;

pressurizing a region within the shoe below the adjustable expansion device using a fluidic material; and
pressurizing an annular region above the adjustable expansion device using the fluidic material; and
radially expanding at least a portion of the tubular liner by a process comprising:
adjusting the adjustable expansion device to a second outside diameter;
pressurizing a region within the shoe below the adjustable expansion device using a fluidic material; and
pressurizing an annular region above the adjustable expansion device using the fluidic material;
wherein the first outside diameter of the adjustable expansion device is greater than the second outside diameter of the adjustable expansion device.

66. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
- means for installing a tubular liner, an adjustable expansion device, and a shoe in the borehole;
 - means for radially expanding at least a portion of the shoe comprising:
 - means for lowering the adjustable expansion device into the shoe;
 - means for adjusting the adjustable expansion device to a first outside diameter;
 - means for pressurizing a region within the shoe below the adjustable expansion device using a fluidic material; and
 - means for pressurizing an annular region above the adjustable expansion device using the fluidic material; and
 - means for radially expanding at least a portion of the tubular liner comprising:
 - means for adjusting the adjustable expansion device to a second outside diameter;
 - means for pressurizing a region within the shoe below the adjustable expansion device using a fluidic material; and
 - means for pressurizing an annular region above the adjustable expansion device using the fluidic material;
- wherein the first outside diameter of the adjustable expansion device is greater than the second outside diameter of the adjustable expansion device.

67. A wellbore casing positioned in a borehole within a subterranean formation, comprising:
- a first wellbore casing comprising:
 - an upper portion of the first wellbore casing; and
 - a lower portion of the first wellbore casing coupled to the upper portion of the first wellbore casing;
 - wherein the inside diameter of the upper portion of the first wellbore casing is less than the inside diameter of the lower portion of the first wellbore casing; and
 - a second wellbore casing comprising:
 - an upper portion of the second wellbore casing that overlaps with and is coupled to the lower portion of the first wellbore casing; and
 - a lower portion of the second wellbore casing coupled to the upper portion of the second wellbore casing;
 - wherein the inside diameter of the upper portion of the second wellbore casing is less than the inside diameter of the lower portion of the second wellbore casing; and
 - wherein the inside diameter of the upper portion of the first wellbore casing is equal to the inside diameter of the upper portion of the second wellbore casing;
 - wherein the second wellbore casing is coupled to the first wellbore casing by the process of:
 - installing the second wellbore casing and an adjustable expansion device in the borehole;
 - radially expanding at least a portion of the lower portion of the second wellbore casing by a process comprising:
 - lowering the adjustable expansion device into the lower portion of the second wellbore casing;
 - adjusting the adjustable expansion device to a first outside diameter;
 - pressurizing a region within the lower portion of the second wellbore casing below the adjustable expansion device using a fluidic material; and
 - pressurizing an annular region above the adjustable expansion device using the fluidic material; and
 - radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:
 - adjusting the adjustable expansion device to a second outside diameter;

pressurizing a region within the shoe below the adjustable expansion device using a fluidic material; and
pressurizing an annular region above the adjustable expansion device using the fluidic material;
wherein the first outside diameter of the adjustable expansion device is greater than the second outside diameter of the adjustable expansion device.

68. An apparatus for forming a wellbore casing in a borehole located in a subterranean formation including a preexisting wellbore casing, comprising:

- a support member including a first fluid passage;
 - a first adjustable expansion device coupled to the support member including a second fluid passage fluidically coupled to the first fluid passage;
 - a second adjustable expansion device coupled to the support member including a third fluid passage fluidically coupled to the first fluid passage;
 - an expandable tubular liner movably coupled to the first and second adjustable expansion devices; and
 - an expandable shoe coupled to the expandable tubular liner comprising:
 - a valveable fluid passage for controlling the flow of fluidic materials out of the expandable shoe;
 - an expandable portion comprising one or more inwards folds; and
 - a remaining portion coupled to the expandable portion;
- wherein the outer circumference of the expandable portion is greater than the outer circumference of the remaining portion.

69. A method of forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:

- installing a tubular liner, an upper adjustable expansion device, a lower adjustable expansion device, and a shoe in the borehole;
- radially expanding at least a portion of the shoe by a process comprising:
 - lowering the lower adjustable expansion device into the shoe;
 - adjusting the lower adjustable expansion device to an increased outside diameter;
 - pressurizing a region within the shoe below the lower adjustable expansion device using a fluidic material; and

pressurizing an annular region above the upper adjustable expansion device using the fluidic material; and
radially expanding at least a portion of the tubular liner by a process comprising:
adjusting the lower adjustable expansion device to a reduced outside diameter;
adjusting the upper adjustable expansion device to an increased outside diameter;
pressurizing a region within the shoe below the lower adjustable expansion device using a fluidic material; and
pressurizing an annular region above the upper adjustable expansion device using the fluidic material;
wherein the increased outside diameter of the lower adjustable expansion device is greater than the increased outside diameter of the upper adjustable expansion device; and
wherein the reduced outside diameter of the lower adjustable expansion device is less than or equal to the increased outside diameter of the upper adjustable expansion device.

70. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
- means for installing a tubular liner, an upper adjustable expansion device, a lower adjustable expansion device, and a shoe in the borehole;
 - means for radially expanding at least a portion of the shoe comprising:
 - means for lowering the lower adjustable expansion device into the shoe;
 - means for adjusting the lower adjustable expansion device to an increased outside diameter;
 - means for pressurizing a region within the shoe below the lower adjustable expansion device using a fluidic material; and
 - means for pressurizing an annular region above the upper adjustable expansion device using the fluidic material; and
 - means for radially expanding at least a portion of the tubular liner comprising:
 - means for adjusting the lower adjustable expansion device to a reduced outside diameter;
 - means for adjusting the upper adjustable expansion device to an increased outside diameter;

means for pressurizing a region within the shoe below the lower adjustable expansion device using a fluidic material; and
means for pressurizing an annular region above the upper adjustable expansion device using the fluidic material;
wherein the increased outside diameter of the lower adjustable expansion device is greater than the increased outside diameter of the upper adjustable expansion device; and
wherein the reduced outside diameter of the lower adjustable expansion device is less than or equal to the increased outside diameter of the upper adjustable expansion device.

71. A wellbore casing positioned in a borehole within a subterranean formation, comprising:
- a first wellbore casing comprising:
 - an upper portion of the first wellbore casing; and
 - a lower portion of the first wellbore casing coupled to the upper portion of the first wellbore casing;
 - wherein the inside diameter of the upper portion of the first wellbore casing is less than the inside diameter of the lower portion of the first wellbore casing; and
 - a second wellbore casing comprising:
 - an upper portion of the second wellbore casing that overlaps with and is coupled to the lower portion of the first wellbore casing; and
 - a lower portion of the second wellbore casing coupled to the upper portion of the second wellbore casing;
 - wherein the inside diameter of the upper portion of the second wellbore casing is less than the inside diameter of the lower portion of the second wellbore casing;
 - and
 - wherein the inside diameter of the upper portion of the first wellbore casing is equal to the inside diameter of the upper portion of the second wellbore casing;
 - wherein the second wellbore casing is coupled to the first wellbore casing by the process of:
 - installing the second wellbore casing, an upper adjustable expansion device, and a lower adjustable expansion device in the borehole;
 - radially expanding at least a portion of the shoe by a process comprising:

lowering the lower adjustable expansion device into the lower portion of the second wellbore casing;
adjusting the lower adjustable expansion device to an increased outside diameter;
pressurizing a region within the lower portion of the second wellbore casing below the lower adjustable expansion device using a fluidic material; and
pressurizing an annular region above the upper adjustable expansion device using the fluidic material; and
radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:
adjusting the lower adjustable expansion device to a reduced outside diameter;
adjusting the upper adjustable expansion device to an increased outside diameter;
pressurizing a region within the lower portion of the second wellbore casing below the lower adjustable expansion device using a fluidic material; and
pressurizing an annular region above the upper adjustable expansion device using the fluidic material;
wherein the increased outside diameter of the lower adjustable expansion device is greater than the increased outside diameter of the upper adjustable expansion device; and
wherein the reduced outside diameter of the lower adjustable expansion device is less than or equal to the increased outside diameter of the upper adjustable expansion device.

72. An apparatus for radially expanding and plastically deforming a tubular member, comprising:
means for injecting fluidic materials into the tubular member to radially expand and plastically deform the tubular member; and
means for radially expanding and plastically deforming the tubular member by displacing an expansion device within the tubular member.
73. A method of forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
installing a tubular liner, an adjustable expansion device, and a shoe in the borehole;
radially expanding at least a portion of the shoe by a process comprising:
adjusting the adjustable expansion device to a first outside diameter; and

injecting a fluidic material into the shoe; and
radially expanding at least a portion of the tubular liner by a process comprising:
adjusting the adjustable expansion device to a second outside diameter; and
displacing the adjustable expansion device relative to the tubular liner.

74. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
- means for installing a tubular liner, an adjustable expansion device, and a shoe in the borehole;
 - means for radially expanding at least a portion of the shoe comprising:
 - means for adjusting the adjustable expansion device to a first outside diameter; and
 - means for injecting a fluidic material into the shoe; and
 - means for radially expanding at least a portion of the tubular liner comprising:
 - means for adjusting the adjustable expansion device to a second outside diameter; and
 - means for displacing the adjustable expansion device relative to the tubular liner.

75. A wellbore casing positioned in a borehole within a subterranean formation, comprising:
- a first wellbore casing comprising:
 - an upper portion of the first wellbore casing; and
 - a lower portion of the first wellbore casing coupled to the upper portion of the first wellbore casing;
 - wherein the inside diameter of the upper portion of the first wellbore casing is less than the inside diameter of the lower portion of the first wellbore casing; and
 - a second wellbore casing comprising:
 - an upper portion of the second wellbore casing that overlaps with and is coupled to the lower portion of the first wellbore casing; and
 - a lower portion of the second wellbore casing coupled to the upper portion of the second wellbore casing;

wherein the inside diameter of the upper portion of the second wellbore casing is less than the inside diameter of the lower portion of the second wellbore casing;
and
wherein the inside diameter of the upper portion of the first wellbore casing is equal to the inside diameter of the upper portion of the second wellbore casing;
wherein the second wellbore casing is coupled to the first wellbore casing by the process of:
installing the second wellbore casing and an adjustable expansion device within the borehole;
radially expanding at least a portion of the lower portion of the second wellbore casing by a process comprising:
adjusting the adjustable expansion device to a first outside diameter,
and
injecting a fluidic material into the second wellbore casing; and
radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:
adjusting the adjustable expansion device to a second outside diameter; and
displacing the adjustable expansion device relative to the tubular liner.

76. A method of forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:
installing a tubular liner, an upper adjustable expansion device, a lower adjustable expansion device, and a shoe in the borehole;
radially expanding at least a portion of the shoe by a process comprising:
adjusting the lower adjustable expansion device to an increased outside diameter; and
injecting a fluidic material into the shoe; and
radially expanding at least a portion of the tubular liner by a process comprising:
adjusting the lower adjustable expansion device to a reduced outside diameter;
adjusting the upper adjustable expansion device to an increased outside diameter; and
displacing the upper adjustable expansion device relative to the tubular liner.

77. A system for forming a wellbore casing in a subterranean formation having a preexisting wellbore casing positioned in a borehole, comprising:

means for installing a tubular liner, an upper adjustable expansion device, a lower adjustable expansion device, and a shoe in the borehole;

means for radially expanding at least a portion of the shoe comprising:

means for adjusting the lower adjustable expansion device to an increased outside diameter; and

means for injecting a fluid material into the shoe; and

means for radially expanding at least a portion of the tubular liner comprising:

means for adjusting the lower adjustable expansion device to a reduced outside diameter;

means for adjusting the upper adjustable expansion device to an increased outside diameter; and

means for displacing the upper adjustable expansion device relative to the tubular liner.

78. A wellbore casing positioned in a borehole within a subterranean formation, comprising:

a first wellbore casing comprising:

an upper portion of the first wellbore casing; and

a lower portion of the first wellbore casing coupled to the upper portion of the first wellbore casing;

wherein the inside diameter of the upper portion of the first wellbore casing is less than the inside diameter of the lower portion of the first wellbore casing; and

a second wellbore casing comprising:

an upper portion of the second wellbore casing that overlaps with and is coupled to the lower portion of the first wellbore casing; and

a lower portion of the second wellbore casing coupled to the upper portion of the second wellbore casing;

wherein the inside diameter of the upper portion of the second wellbore casing is less than the inside diameter of the lower portion of the second wellbore casing;

and

wherein the inside diameter of the upper portion of the first wellbore casing is equal to the inside diameter of the upper portion of the second wellbore casing;

wherein the second wellbore casing is coupled to the first wellbore casing by the process of:

installing the second wellbore casing, an upper adjustable expansion device, a lower adjustable expansion device, and a shoe in the borehole;

radially expanding at least a portion of the lower portion of the second wellbore casing shoe by a process comprising:

adjusting the lower adjustable expansion device to an increased outside diameter; and

injecting a fluidic material into the lower portion of the second wellbore casing; and

radially expanding at least a portion of the upper portion of the second wellbore casing by a process comprising:

adjusting the lower adjustable expansion device to a reduced outside diameter;

adjusting the upper adjustable expansion device to an increased outside diameter; and

displacing the upper adjustable expansion device relative to the tubular liner.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/00609

A. CLASSIFICATION OF SUBJECT MATTER		
IPC(7) : E21B 43/10 US CL : 166/380, 207		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) U.S. : 166/380, 207, 212, 216, 217		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2002/0033261 A1 (METCALFE) 21 March 2002 (21.03.02), summary:	1-55
A	US 6,085,838 A (VERCAEMER et al.) 11 July 2000 (11.07.02), figures 5-7.	1-55
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 15 April 2003 (15.04.2003)		Date of mailing of the international search report 20 MAY 2003
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703)305-3230		Authorized Officer David Bagnell Telephone No. (703) 308-1113

Form PCT/ISA/210 (second sheet) (July 1998)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.